


# SV4-8-3/3P - Solenoid valve

3-way, 2-position spool type solenoid valve  
 13 L/min (4 USgpm) • 210 bar (3000 psi)

www: [www.salushydraulics.pl](http://www.salushydraulics.pl)  
 e-mail: [pl@salushydraulics.pl](mailto:pl@salushydraulics.pl)  
 shop/sklep: [www.salushydraulics.pl/sklep/](http://www.salushydraulics.pl/sklep/)

A



### Operation


In the de-energized position this valve allows flow from port 2 to 1 while port 3 is blocked.

In the energized position flow is allowed from port 2 to port 3 while port 1 is blocked.

### Features

Hardened, ground and honed working parts to limit leakage. IP69K Tough coil compatibility. Continuously rated. Compact design with low pressure drop. Rated pressure on all ports.

### Sectional view

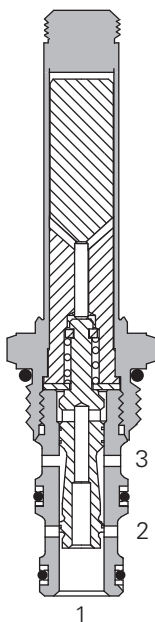

### Performance data

#### Ratings and specifications

Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Cartridge fatigue pressure (infinite life)	210 bar (3000 psi)
Rated flow	13 L/min (4 USgpm)
Internal leakage	82 cm <sup>3</sup> /min (5 in <sup>3</sup> /min) max @ 210 bar (3000 psi)
Temperature range	-40° to 120°C (-40° to 248°F)
Coil duty	Continuous from 85% to 110% of nominal voltage
Response times (100% rated voltage and flow)	Energize: 22 ms De-Energize: 27 ms
Cavity	C-8-3
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20 etc.
Filtration	Cleanliness code 18/16/13
Housing material (standard)	Aluminum
Weight including coil	0,29 kg (0.64 lbs)
Seal kit	02-160755 (Buna-N), 02-160756 (Viton®)

Viton is a registered trademark of E.I. DuPont


**Note:** Pressure on port 1 should not exceed 20 bar (300 psi).

### Description

This is a 3-way 2-position, direct acting, spool type solenoid valve. This valve can be used in applications requiring separate pressure and tank lines, such as a single acting cylinder or any other application where a three way two position solenoid valve is needed.


### Pressure drop

Cartridge only

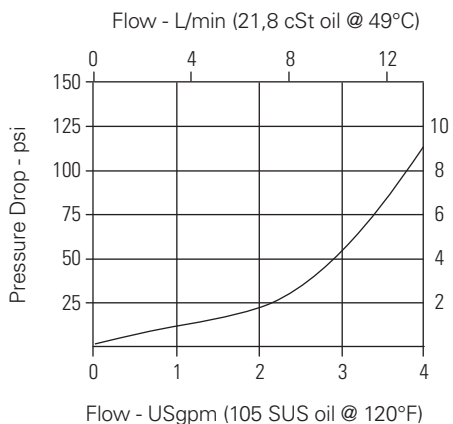

#### Pressure drop vs. Flow

Port 2 to 1 and  
 port 2 to port 3

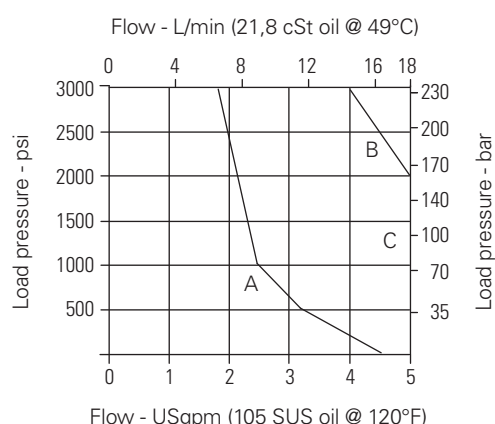

#### Operating Limits


- A** - Normally open port 1 to port 2
- B** - Normally closed port 3 to port 1
- C** - Selector 2 to 1 and 2 to 3

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

# SV4-8-3/3P - Solenoid valve

3-way, 2-position spool type solenoid valve  
13 L/min (4 USgpm) • 210 bar (3000 psi)

## Model code



A

### 1 Function

SV4 - Solenoid valve

### 2 Size

8 - 8 size

### 3 Seal material

Blank - Buna-N

V - Viton®

### 4 Style

3 - 3-way, 2 position

### 5 Manual override option

Blank - No manual override

P - Push type

For valve dimensions with manual override option installed see page A-980.

### 6 Valve housing material

Omit for cartridge only

A - Aluminum

### 7 Port size

Code	Port size	Housing number
0	Cartridge only	
2G	1/4" BSPP	02-160739
3G	3/8" BSPP	02-160740
4T	SAE 4	02-160741
6T	SAE 6	02-160742

See section J for housing details.

### 8 Voltage rating

00 - No coil

12D - 12VDC

24D - 24VDC

36D - 36VDC

24A - 24VAC

115A - 115VAC

230A - 230VAC

12B - 12VDC/w diode\*

24B - 24VDC/w diode\*

\*Optional arc suppression diode.

### 9 Connector types

Blank - No coil

G - ISO 4400 DIN 43650

Q - Spade terminals

W - Flying lead

N - Deutsch (DC only)

Y - Amp JR (DC only)

D - Metripack 150 male (DC only)

J - Metripack 280 male (DC only)

### 10 Coil series

S - 8 series, 20 W

For coil part numbers and dimensions see section C.

### 11 Special features


00 - None

(Only required if valve has special features, omitted if "00".)

## Dimensions

mm (inch)


### Cartridge only

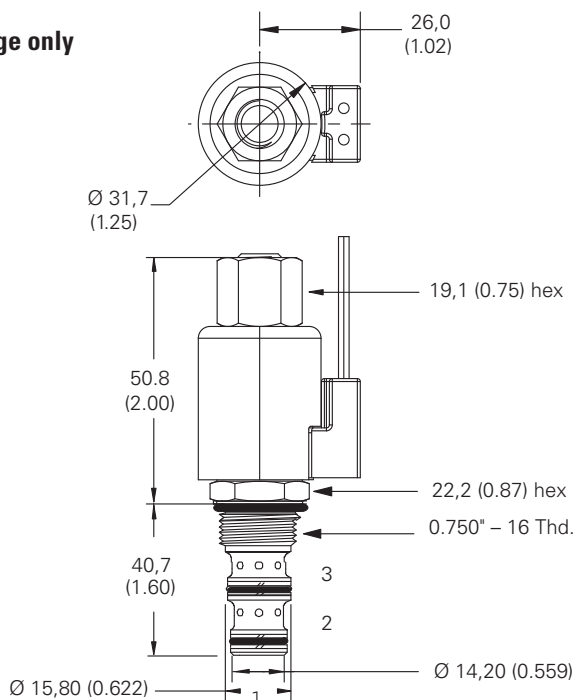

Torque cartridge in steel or aluminum housing 34-41 Nm (25-30 ft lbs)

**Note:** When solenoid valve is ordered as cartridge only, nut is included.

### Installation drawing

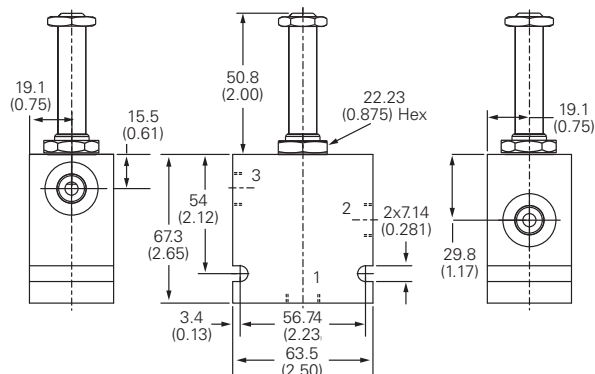

### Warning

Maintain 5-8 Nm (4-6 ft lbs) maximum torque on valve tube nut.

Over tightening may cause valve failure.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.